

# Series 107 Nylon Extractor

# **CONNECT AND PROTECT**

# Series 107 Nylon Inserter / Extractor

### **MATERIALS**

#### **Extractor**

Molded in Glass Filled (30%) 6/6 or Type 6 Nylon. UL94-V0 parts are self extinguishing to flame. May be used at 121°C (250°F) continuously. Resistant to alkalies, weak acids, and common solvents.

# **Assembly Pin**

Stainless steel, passivated

#### **COLOR**


Series 107 standard color is black. Other colors available, please contact an Application Engineer with your requirements.

#### **HOT STAMPING**

Hot stamp marking service is available. Please contact an Application Engineer with your requirements.

# **APPLICATION DATA**

Two inserter or inserter-extractors are recommended per printed circuit board taller than 127 (5) in height.

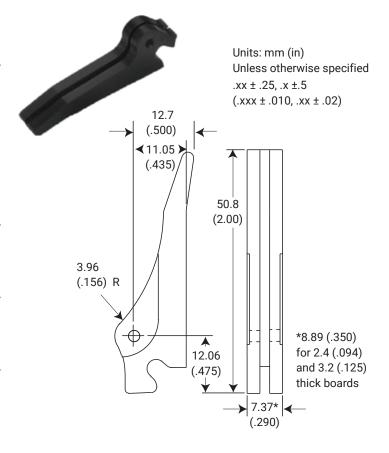



# **Details of Actuating Surfaces**

Required on top and Bottom guide plates

Provides insertion and extraction travel of 8.9 (.35) min.

Nominal postion of card edge when seated in connector. The inserter-extractor can move the board an additional 1.3 (.050) if necessary due to the tolerances of the assembly

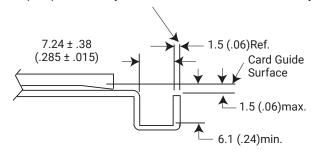

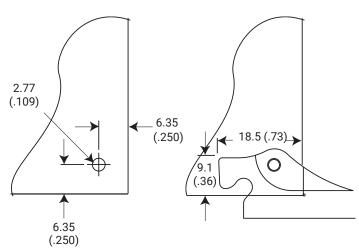


#### **ASSEMBLY PIN**


Option to be pre-started for:

- · Faster and easier installation of the extractor to the PCB
- Eliminates the need for special tools or equipment and set up time.
- · Eliminates loss of loose assembly pins

If the "P" option is not selected, the extractors and the pins will be packaged seperately.

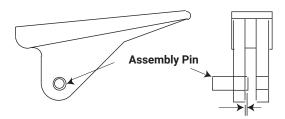

2.38 (.094) dia x 6.35 (.250) long for PCB thickness 1.6 (.063) 2.38 (.094) dia x 7.95 (.313) long for PCB thickness 2.4 (.094) Pin protrusion of approximately .38 (.015) seeks hole in PCB

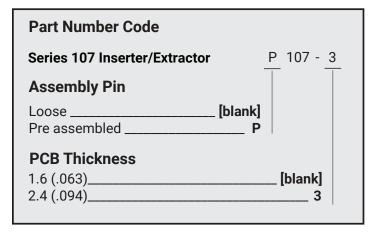

Part Number Code example: P107-3

Series 107 extractor, with pre-started assembly pin, for PCB thickness of 2.4 (.094)

**nVent SCHROFF, Inc.** 

7328 Trade Street, San Diego, CA 92121 USA, +1 800-525-4682

**CALMARK™** 



Our powerful portfolio of brands:

**CADDY** HOFFMAN RAYCHEM SCHROFF **ERICO** TRACER